

FERRITE BEADS

HR6H TYPE


HR6H Type Cores are used for shielded beads above 50MHz, the impedance is substantially resistive and constant. The beads consist of rod-type bodies with six axial holes through which wire is threaded to form a 1.5 or 2.5 turns coil.

COIL CODE

HR6H 6.2 x 10 3TS

HR6H TYPE
ØA DIM
B DIM
TURNS

CONSTRUCTION (m/m)

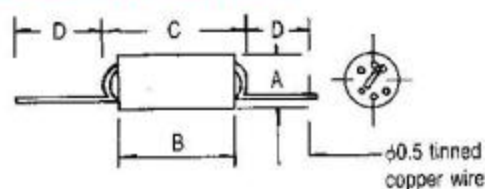

ELECTRICAL SPECIFICATIONS

Dimensions in m/m

PART NO.	TURNS	TYPICAL IMPEDANCE (Ω)		
		10MHz (min)	50MHz (min)	100MHz (min)
HR6H 6.2*10-1.5TS	1.5	150	250	300
HR6H 6.2*10-2T	2	250	400	450
HR6H 6.2*10-2.5TS	2.5	350	450	600
HR6H 6.2*10-3TS	3	450	700	800

* All parameters as this content presented are subject to final specifications both sides confirmed.