



HCRH0732 TYPE

TYPE

HCRH 0732



DIMENSION

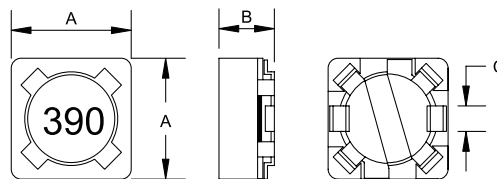

A: 7.3 ± 0.2

B: 3.2 ± 0.2

C: 2.0 ± 0.1

SPECIFICATION

ITEM HCRH0732	L (μ H)	DCR MAX.(Ω)	IDC MAX.(A)
100M	10 \pm 20%	0.072	1.68
120M	12 \pm 20%	0.098	1.52
150M	15 \pm 20%	0.130	1.33
180M	18 \pm 20%	0.140	1.20
220M	22 \pm 20%	0.190	1.07
270M	27 \pm 20%	0.210	0.96
330M	33 \pm 20%	0.240	0.91
390M	39 \pm 20%	0.320	0.77
470M	47 \pm 20%	0.360	0.76
560M	56 \pm 20%	0.470	0.68
680M	68 \pm 20%	0.520	0.61
820M	82 \pm 20%	0.690	0.57
101M	100 \pm 20%	0.790	0.50
121M	120 \pm 20%	0.890	0.49
151M	150 \pm 20%	1.270	0.43
181M	180 \pm 20%	1.450	0.39
221M	220 \pm 20%	1.650	0.35
271M	270 \pm 20%	2.310	0.32
331M	330 \pm 20%	2.620	0.28
391M	390 \pm 20%	2.940	0.26
471M	470 \pm 20%	4.180	0.24
561M	560 \pm 20%	4.670	0.22
681M	680 \pm 20%	5.730	0.19
821M	820 \pm 20%	6.540	0.18
102M	1000 \pm 20%	9.440	0.16

J: $\pm 5\%$, K: $\pm 10\%$, M: $\pm 20\%$

* Hong can design any part to your requirements with different inductance.

* All parameters as this content presented are subject to final specifications both sides confirmed.