


HCRH0745 TYPE

TYPE

HCRH 0745

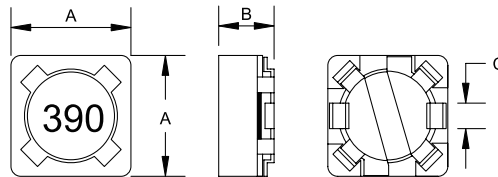

A: 7.3±0.2
B: 4.5 MAX.
C: 2.0±0.1

DIMENSION

SPECIFICATION

ITEM	L	DCR	IDC
HCRH0745	(μH)	MAX.(mΩ)	MAX.(A)
100M	10±20%	49	1.84
120M	12±20%	58	1.71
150M	15±20%	81	1.47
180M	18±20%	91	1.31
220M	22±20%	110	1.23
270M	27±20%	150	1.12
330M	33±20%	170	1.96
390M	39±20%	230	0.91
470M	47±20%	260	0.88
560M	56±20%	350	0.75
680M	68±20%	380	0.69
820M	82±20%	430	0.61
101M	100±20%	610	0.60
121M	120±20%	660	0.52
151M	150±20%	880	0.46
181M	180±20%	980	0.42
221M	220±20%	1170	0.36
271M	270±20%	1640	0.34
331M	330±20%	1860	0.32
391M	390±20%	2850	0.29
471M	470±20%	3010	0.26
561M	560±20%	3620	0.23
681M	680±20%	4630	0.22
821M	820±20%	5200	0.20
102M	1000±20%	6000	0.18

J: ± 5%, K: ± 10%, M: ± 20%

* Hong can design any part to your requirements with different inductance.

* All parameters as this content presented are subject to final specifications both sides confirmed.