



HCRH125 TYPE

TYPE

HCRH 125



DIMENSION

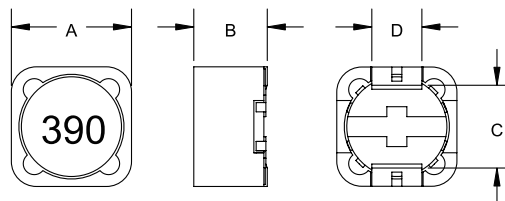

A: 12±0.3
B: 6 MAX.
C: 8±0.3
D: 5±0.2

SPECIFICATION

ITEM	L	DCR	IDC
HCRH125	(μH)	MAX. (mΩ)	MAX. (A)
100M	10±20%	34	4.00
120M	12±20%	37	3.50
150M	15±20%	43	3.30
180M	18±20%	45	3.00
220M	22±20%	49	2.80
270M	27±20%	55	2.30
330M	33±20%	66	2.10
390M	39±20%	72	2.00
470M	47±20%	87	1.80
560M	56±20%	118	1.70
680M	68±20%	128	1.50
820M	82±20%	150	1.40
101M	100±20%	164	1.30
121M	120±20%	210	1.10
151M	150±20%	246	1.00
181M	180±20%	299	0.90
221M	220±20%	412	0.80
271M	270±20%	470	0.75
331M	330±20%	577	0.68
391M	390±20%	700	0.65
471M	470±20%	752	0.58
561M	560±20%	906	0.54
681M	680±20%	1257	0.48
821M	820±20%	1380	0.43
102M	1000±20%	1629	0.40

J: ± 5%, K: ± 10%, M: ± 20%

* Hong can design any part to your requirements with different inductance.

* All parameters as this content presented are subject to final specifications both sides confirmed.