


HCRH5D18 TYPE

TYPE

HCRH 5D18

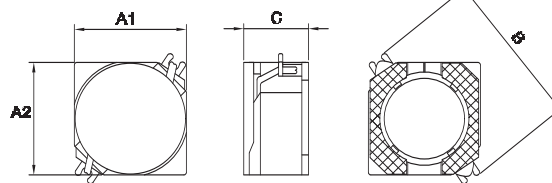

A1: 5.7 MAX.
A2: 5.7 MAX.
B: 8.2 MAX.
C: 2.0 MAX.

SPECIFICATION

ITEM	L	DCR	IDC1/IDC2
HCRH5D18	(μ H)	MAX.(m Ω)	MAX.(A)
5R4N	5.4 \pm 30%	76	1.55
6R2N	6.2 \pm 30%	96	1.38
8R9N	8.9 \pm 30%	116	1.12
100N	10 \pm 30%	162	1.05
120N	12 \pm 30%	192	0.95
150N	15 \pm 30%	225	0.90
180N	18 \pm 30%	260	0.85
220N	22 \pm 30%	280	0.70
270N	27 \pm 30%	300	0.65
330N	33 \pm 30%	386	0.60
390N	39 \pm 30%	480	0.55
470N	47 \pm 30%	520	0.48
560N	56 \pm 30%	665	0.45
680N	68 \pm 30%	800	0.40
820N	82 \pm 30%	978	0.36
101N	100 \pm 30%	1200	0.33

N: \pm 30%

* Hong can design any part to your requirements with different inductance.

* All parameters as this content presented are subject to final specifications both sides confirmed.