


HCRH5D28 TYPE

TYPE

HCRH 5D28

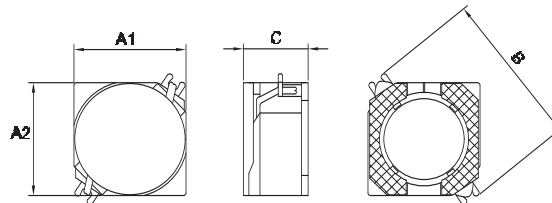

A1: 5.7 MAX.
A2: 5.7 MAX.
B: 8.2 MAX.
C: 3.1 MAX.

SPECIFICATION

ITEM	L	DCR	IDC1/IDC2
HCRH5D28	(μ H)	MAX.(m Ω)	MAX.(A)
2R6N	2.6 \pm 30%	32	2.6
3R0N	3.0 \pm 30%	34	2.4
4R2N	4.2 \pm 30%	38	2.2
5R3N	5.3 \pm 30%	54	1.9
6R2N	6.2 \pm 30%	58	1.8
8R2N	8.2 \pm 30%	66	1.6
100N	10 \pm 30%	81	1.3
120N	12 \pm 30%	90	1.2
150N	15 \pm 30%	103	1.1
180N	18 \pm 30%	130	1.0
220N	22 \pm 30%	150	0.9
270N	27 \pm 30%	220	0.85
330N	33 \pm 30%	230	0.75
390N	39 \pm 30%	250	0.70
470N	47 \pm 30%	300	0.62
560N	56 \pm 30%	330	0.58
680N	68 \pm 30%	360	0.52
820N	82 \pm 30%	550	0.46
101N	100 \pm 30%	630	0.42

N: \pm 30%

* Hong can design any part to your requirements with different inductance.

* All parameters as this content presented are subject to final specifications both sides confirmed.