



HPT TYPE

CONSTRUCTION (m/m)

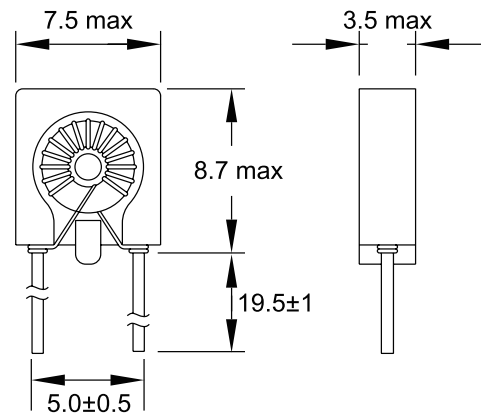


COIL CODE

HPT 75 80 35 100 K

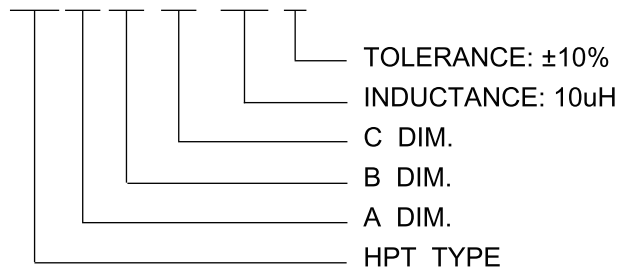

SCHEMATIC DIAGRAM

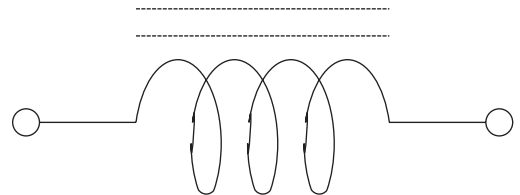

ELECTRICAL SPECIFICATIONS

Dimensions in m/m

ITEM	L (1KHZ/0.25V) (uH)	DCR (mΩ)	IDC (mA)	INSULATION VOLTAGE LINE TO CASE (V DC)	RATED VOLTAGE (V)	INSULATION RESISTANCE (mΩ) MIN.
HPT 758035						
100	10 \pm 50%	20	500	200	50	10
400	40 \pm 50%	34	500	200	50	10
600	60 \pm 50%	50	500	200	50	10

MATERIALS

- (1) CORE : FERRITE TR CORE
- (2) BASE : HY-B025
- (3) PIN : CP WIRE
- (4) WIRE : ENAMELLED COPPER WIRE

GENERAL CHARACTERISTICS

- (1) STORAGE TEMP. : -25°C-----+85°C
- (2) OPERATING TEMP. : -25°C----+70°C
- (3) TEMP. RISE : 20°C MAX. AT RATED CURRENT

* All parameters as this content presented are subject to final specifications both sides confirmed.