


HSR TYPE

(FOR HIGH CURRENT, SWITCHING POWER SUPPLY)
CUSTOMERS' SPECIFICATION ARE WELCOME

CONSTRUCTION (m/m)

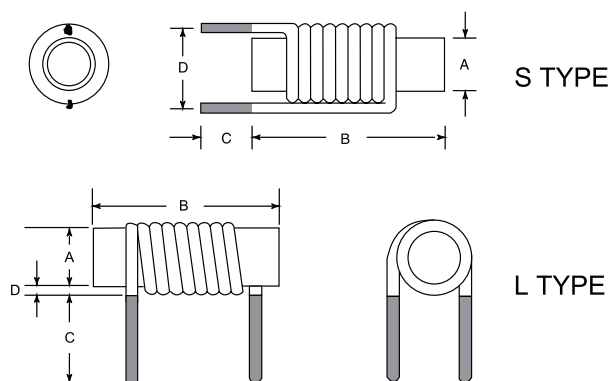

COIL CODE

HSR 06 30 S T 100 K

TOLERANCE: $\pm 10\%$
INDUCTANCE: $10\mu\text{H}$
T: TUBE
TYPE: S TYPE
L TYPE
B DIM: 30 m/m
A DIM: 6 m/m
HSR TYPE COIL

FOR INSTANCE:

HSR0615 ☐ ☐ ☐ ☐
HSR0620 ☐ ☐ ☐ ☐
HSR0625 ☐ ☐ ☐ ☐
HSR0630 ☐ ☐ ☐ ☐

HSR0310 ☐ ☐ ☐ ☐
HSR0820 ☐ ☐ ☐ ☐
HSR0830 ☐ ☐ ☐ ☐

CHARACTERISTICS

STYLEHSR TYPE (CORE: R CORE)
TEMPERATURE RISE 20°C
AMBIENT TEMPERATURE 80°C
TEMPERATURE RANGE -20°C to 100°C

* All parameters as this content presented are subject to final specifications both sides confirmed.