



### PK TYPE

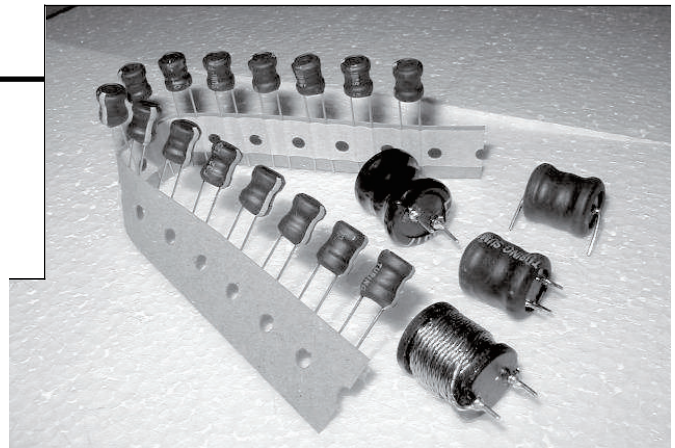

#### CONSTRUCTION (m/m)

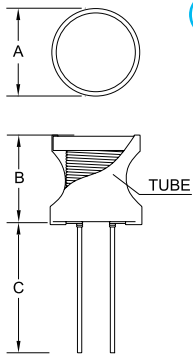


#### FOR INSTANCE

PK 0814T	□	□	□	□
PK 0916T	□	□	□	□
PK 1016T	□	□	□	□
PK 1413T	□	□	□	□
PK 1622T	□	□	□	□

#### CHARACTERISTICS

STYLE .....	RADIAL LEAD
TEMPERATURE .....	20°C
AMBIENT TEMPERATURE .....	80°C
TEMPERATURE RANGE .....	-20°C TO +100°C
TERMINAL TENSILE STRENGTH .....	2.5 KG MIN.
OUTSIDE DIM .....	3Ø ~ 16Ø.


#### COIL CODE

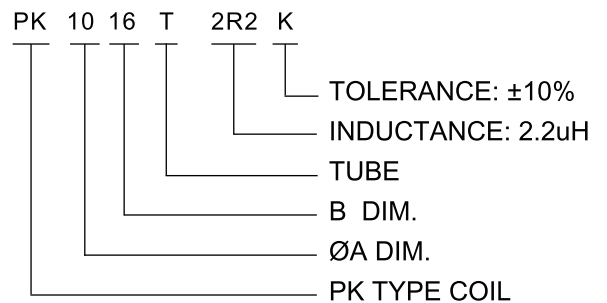

### PA TYPE



#### CONSTRUCTION (m/m)

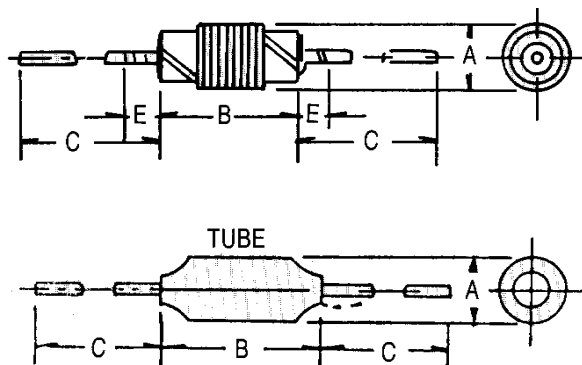

#### FOR INSTANCE

PA 0814T	□	□	□	□
PA 0916T	□	□	□	□
PA 1016T	□	□	□	□
PA 1419T	□	□	□	□

\* All parameters as this content presented are subject to final specifications both sides confirmed.